


FULL FIBREGLASS DOUBLE SIDED LADDER



- ▬ Fibreglass steps are ribbed for extra strength, and are anti-slip
- ▬ Fibre crossbars provide extra strength to steps and structure
- ▬ Plastic top contains tool holding provision
- ▬ Identical front and back sections permit two persons to use the ladder at the same time
- ▬ 74° angle positioning and conical construction ensures safety when standing upright
- ▬ Wide fibreglass channel for grip and extra strength

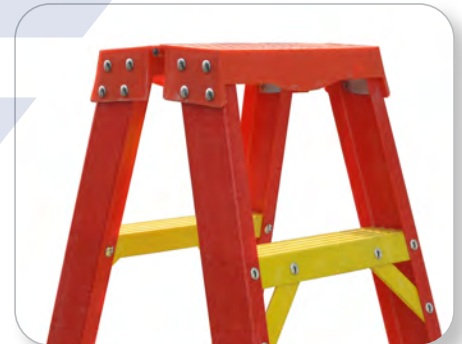

**ELECTRICALLY
NON-CONDUCTIVE**

FULL FIBREGLASS DOUBLE SIDED LADDER LOAD CAPACITY: 150 KG

| ITEM CODE | STEPS + TOP | FREESTANDING HEIGHT | | APPROXIMATE WEIGHT |
|-----------|-------------|---------------------|-------|--------------------|
| | | METRES | FEET | KILOGRAMS |
| FFDS 4 | 4 (3+1) | 1.1 | 3'7" | 8.5 |
| FFDS 6 | 6 (5+1) | 1.7 | 5'7" | 11.9 |
| FFDS 8 | 8 (7+1) | 2.3 | 7'7" | 15.8 |
| FFDS 10 | 10 (9+1) | 2.9 | 9'6" | 20.1 |
| FFDS 12 | 12 (11+1) | 3.5 | 11'6" | 23.0 |

TECHNICAL FEATURES ARE INDICATIVE AND CAN BE MODIFIED WITHOUT PRIOR NOTICE
THE NUMBER OF STEPS MENTIONED INCLUDES THE TOP STEP, ALTHOUGH ONE MUST NOT STAND/WORK ON THIS STEP

Applicable for:

Zone 1 Environments in Oil & Gas Industries

Pharmaceutical & Medical Industries

TAKING YOU ONE STEP HIGHER