

CAT LADDER

150 KG LOAD CAPACITY

ALSO KNOWN AS CAGE LADDER OR VERTICAL LADDER

Product Features:

- Ideal for use in sewage networks, garbage tips, storage reservoirs, pump shafts, tanks, roof access etc.
- Non-slip ribbed rungs.
- Rectangular channel construction.
- Bracket/wall stay option available in steel or aluminium.
- Aluminium cage of 800mm diameter for ladders above 3.0m vertical height.

Wall Bracket / Stays




Cage



Optional Extras:

- Retractable handrail for access into tanks/chambers, or to exit onto platforms.
- Floor connection/base plate.
- Security door access barrier (padlock extra).
- Landing rails to exit onto roof landing.
- Anchor bolts/screws not part of delivery scope, unless specified.

Product Dimensions:

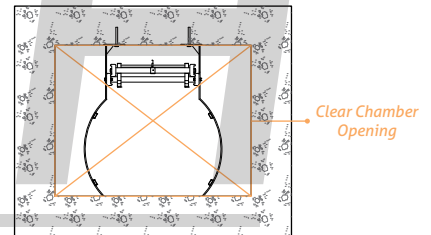

REACH Ladders & Scaffolding

Retractable Handrail

Security Door Access Barrier

Exit Rail onto Platform



Product Code: CAT

Standard Dimensions:

Step interval: 300mm standard

Step width: 500mm standard


Step depth: 30mm

Cage Diameter: Min. 700mm, Max. 800mm

Distance to wall: Min. 150mm (Bracket Length)

Clear Height from Chamber Opening: Max. 100mm

Clear Height from Ground Level: Max. 200mm

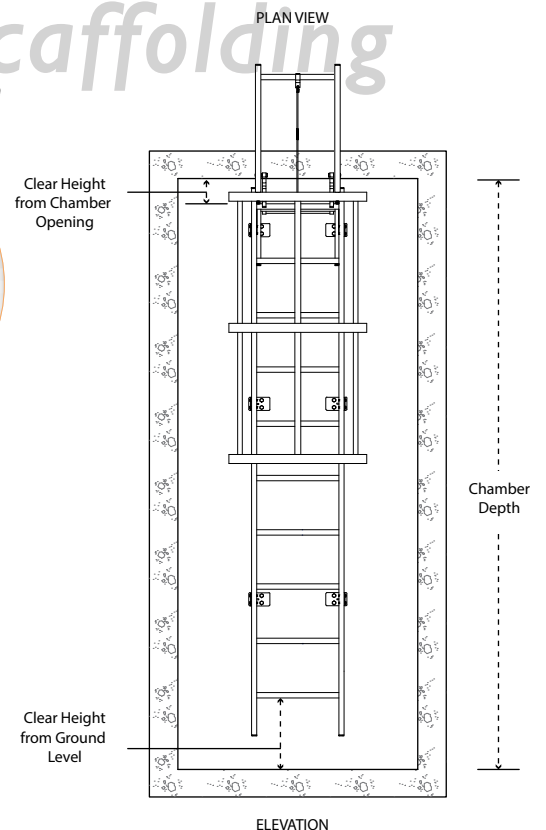

Reach for the skies